

Super-rapid fittings for plastic tubes Series 6000 and 6000 Micro

03 5278 8222

sales@factorycontrols.com.au

www.factorycontrols.com.au

65 Douro Street, North Geelong Victoria 3215

Tube external diameters: 3 (Micro only), 4, 5, 6, 8, 10, 12, 14, 16 mm
Threaded connections: M3 (Micro only), M5, M7, G1/8, G1/4, G3/8, G1/2, R1/8, R1/4, R3/8, R1/2



Super-rapid fittings Series 6000 are available in 35 different models.

Super-rapid fittings Series 6000 Micro are available in 14 different models.


Connection and disconnection of the tube can be repeated several times and can be performed without the use of tools.

The extractable internal collet allows the sealing ring (O-ring) to be easily replaced if it is damaged or in case of wear of the rubber compound.

GENERAL DATA

Material	body and collet: nickel-plated brass; O-Ring: NBR; thread seal: PTFE - NBR - PA
Threads	series 6000 Micro: M3 - M5 - M7 - G1/8 - G1/4 series 6000: GAS conical ISO 7 (BSPT) GAS cylindrical ISO 228 (BSP) M5-M6 and other metric threads available on request NPT on request
Pressure	min -0,9 bar - max 16 bar (see tubing)
Tube to connect	Rilsan, PA 6-11-12, polyethylene, PU
Diameters	series 6000 Micro: \varnothing 3 - 4 - 6 - 8 - 10 mm series 6000: \varnothing 4 mm + \varnothing 16 mm
Fluid	compressed air (for other types of fluid, contact our engineers)
Temperature	series 6000 Micro: -10°C + 80°C (see data for tubing used) series 6000: -20°C + 80°C (see data for tubing used)


Fitting with conduction tube

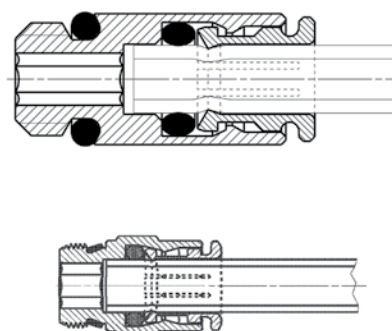

Fittings Mod. S6510


New sizes

Sprint®



DIMENSIONS										
Mod.	A	D	C	F	G	H	L	SW	SW1	Weight (g)
S6510 4-1/8	4	G1/8	3,8	8,8	13,2	5,5	18	12	2,5	9
S6510 4-1/4	4	G1/4	5,5	8,8	15,2	7	19,5	14	2,5	15
S6510 5-1/8	5	G1/8	3,8	9,8	13,2	5,5	19	12	3	8
S6510 5-1/4	5	G1/4	5,5	9,8	15,2	7	20	14	3	14
S6510 6-1/8	6	G1/8	6	11,7	13,2	5,5	22	12	4	10
S6510 6-1/4	6	G1/4	5,5	11,7	15,2	7	21	14	4	14
S6510 6-3/8	6	G3/8	6,5	11,7	20,5	8	22,5	19	4	27
S6510 8-1/8	8	G1/8	7,5	13,7	15,2	5,5	25	14	5	13
S6510 8-1/4	8	G1/4	6,5	13,7	15,2	7	24	14	6	14
S6510 8-3/8	8	G3/8	6	13,7	20,5	8	23,5	19	6	25
S6510 8-1/2	8	G1/2	7,5	13,7	24,5	9	25	22	6	43
S6510 10-1/4	10	G1/4	8,3	15,4	18,5	7	28,5	17	7	23
S6510 10-3/8	10	G3/8	5,3	15,4	20,5	8	25,5	19	8	27
S6510 10-1/2	10	G1/2	4,8	15,4	24,5	9	25	22	8	39
S6510 12-1/4	12	G1/4	10,3	18,3	20,5	7	29,5	19	7	26
S6510 12-3/8	12	G3/8	9,3	18,3	20,5	8	28,5	19	9	30
S6510 12-1/2	12	G1/2	5,8	18,3	24,5	9	25	22	10	36
S6510 14-3/8	14	G3/8	10,3	20,5	24,5	8	30,5	22	9	42
S6510 14-1/2	14	G1/2	6,3	20,5	24,5	9	26,5	22	12	34
S6510 16-1/2	16	G1/2	9	23,5	26,5	9	32	24	-	42
S6510 16-3/4	16	G3/4	3,5	23,5	27,3	9	26,5	24	-	46


Fittings Mod. 6512 Micro



DIMENSIONS							
Mod.	A	D	F	H	L	SW1	Weight (g)
6512 3-M3	3	M3	5,8	2,5	10,2	1,5	1
6512 3-M5	3	M5	5,8	3,5	10	2	1
6512 4-M7-M	4	M7	9,4	5	17,5	2,5	5
6512 4-1/8-M	4	G1/8	11,2	5	13	2,5	9
6512 6-M7-M	6	M7	10,4	5	17	4	7
6512 6-1/8-M	6	G1/8	11,2	5	14	4	7
6512 8-1/8-M	8	G1/8	12,4	5	18,5	5	10
6512 10-1/4-M	10	G1/4	14,8	6	21	7	16


* = with Mod. 2661 assembled
 • = with O-Ring assembled

Fittings Mod. 6512
With O-Ring assembled



DIMENSIONS										
Mod.	A	D	C	F	G	H	L	SW	SW1	Weight (g)
6512 4-M5	4	M5	6	7,8	8,8	4	20	8	2	4
6512 4-M6	4	M6	6,5	8,8	9,9	4,5	20,5	9	2,5	6
6512 4-1/8	4	G1/8	5	8,8	13,5	6	19	12	2,5	10
6512 4-1/4	4	G1/4	6,5	8,8	16,4	7	20,5	15	2,5	14
6512 5-M5	5	M5	6	8,8	9,9	4	21	9	2	5
6512 6-M5	6	M5	6	11,7	13,2	4	22	12	2	8
6512 6-1/8	6	G1/8	5	11,7	13,5	6	21	12	4	10
6512 6-1/4	6	G1/4	6	11,7	16,4	7	22	15	4	13
6512 8-1/8	8	G1/8	8,5	13,7	15,2	6	26	14	5	15
6512 8-1/4	8	G1/4	7	13,7	16,4	7	24,5	15	6	17
6512 8-3/8	8	G3/8	6,5	13,7	20,5	7	23	19	6	27
6512 10-1/4	10	G1/4	9,8	15,4	18,5	7	30	17	7	26
6512 10-3/8	10	G3/8	5,3	15,4	20,5	7	24,5	19	8	27
6512 12-1/4	12	G1/4	10,5	18,3	20,5	7	29,5	19	7	29
6512 12-3/8	12	G3/8	5,8	18,3	20,5	7	24	19	9	24


Fittings Mod. 6463

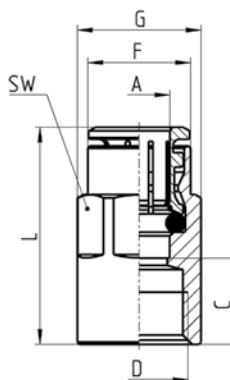

DIMENSIONS									
Mod.	A	D	C	F	G	L	SW	Weight (g)	
6463 4-M5	4	M5	6,5	7,8	8,8	20,5	9	8	
6463 4-1/8	4	G1/8	10	9	13	24	12	14	
6463 5-1/8	5	G1/8	10	9,8	13	25	12	14	
6463 6-1/8	6	G1/8	10	11,7	13	26	12	14	
6463 6-1/4	6	G1/4	11,5	11,9	16,5	27,5	15	23	
6463 8-1/8	8	G1/8	9,5	13,7	15,2	27	14	16	
6463 8-1/4	8	G1/4	11,5	13,7	16,5	29	15	23	
6463 10-1/4	10	G1/4	11,3	15,4	18,5	31,5	17	29	

Fittings Mod. S6520
New sizes


Swivel elbow Mod. Sprint®



Mod.	A	D	C	E	F	H	M	SW	SW1	Weight (g)
S6520 4-1/8	4	G1/8	3,5	14,5	9	5,5	17,5	8	12	17
S6520 4-1/4	4	G1/4	3,5	14,5	9	7	17,5	8	14	23
S6520 5-1/8	5	G1/8	5,5	14,5	10	5,5	20,5	9	12	17
S6520 5-1/4	5	G1/4	5,5	14,5	10	7	20,5	9	14	23
S6520 6-1/8	6	G1/8	4	15	12,7	5,5	20	9	12	20
S6520 6-1/4	6	G1/4	4	15	12,7	7	20	9	14	23
S6520 6-3/8	6	G3/8	4	15,5	12,7	8	20	9	19	33
S6520 8-1/8	8	G1/8	5	16	14,2	5,5	22,5	11	12	22
S6520 8-1/4	8	G1/4	5	16	14,2	7	22,5	11	14	26
S6520 8-3/8	8	G3/8	5	16,5	14,2	8	22,5	11	19	41
S6520 8-1/2	8	G1/2	5	17	14,2	9	22,5	11	22	48
S6520 10-1/4	10	G1/4	5,8	18,5	16,5	7	26	13	14	32
S6520 10-3/8	10	G3/8	5,8	19	16,5	8	26	13	19	43
S6520 10-1/2	10	G1/2	5,8	19,5	16,5	9	26	13	22	62
S6520 12-1/4	12	G1/4	7,3	20	19,5	7	26,5	15	17	49
S6520 12-3/8	12	G3/8	7,3	20	19,5	8	26,5	15	19	48
S6520 12-1/2	12	G1/2	7,3	20,5	19,5	9	26,5	15	22	70
S6520 14-3/8	14	G3/8	8,3	21	21,5	8	28,5	17	19	74
S6520 14-1/2	14	G1/2	8,3	21,5	21,5	9	28,5	17	22	78

Fittings Mod. 6522 Micro

Swivel elbow




Mod.	A	D	E	H	M	SW	SW1	Weight (g)	
6522 3-M3	3	M3	13,7	2,5	13,7	6	6	4	★
6522 3-M5	3	M5	13,7	3,5	13,7	6	8	5	●

 ★ = with Mod. 2661 assembled
 ● = with O-Ring assembled

Fittings Mod. 6522


Swivel elbow with O-Ring assembled



DIMENSIONS										
Mod.	A	D	C	E	F	H	M	SW	SW1	Weight (g)
6522 4-M5	4	M5	3,5	12,5	9	4	17,5	8	8	12
6522 4-1/8	4	G1/8	3,5	14,5	9	6	17,5	8	12	15
6522 4-1/4	4	G1/4	3,5	15,5	9	7	17,5	8	15	25
6522 5-M5	5	M5	5,5	12,5	10	4	20,5	9	8	13
6522 6-M5	6	M5	4	13	12,7	4	20	9	10	14
6522 6-1/8	6	G1/8	4	15	12,7	6	20	9	12	19
6522 6-1/4	6	G1/4	4	16	12,7	7	20	9	15	27
6522 8-1/8	8	G1/8	5	16	14,2	6	22,5	11	12	22
6522 8-1/4	8	G1/4	5	17	14,2	7	22,5	11	15	28
6522 8-3/8	8	G3/8	5	17	14,2	7	22,5	11	19	45
6522 10-1/4	10	G1/4	5,8	19,5	16,5	7	26	13	15	41
6522 10-3/8	10	G3/8	5,8	19,5	16,5	7	26	13	19	45
6522 12-1/4	12	G1/4	7,3	20	19,5	7	26,5	15	17	51
6522 12-3/8	12	G3/8	7,3	20,5	19,5	7	26,5	15	19	56

Fittings Mod. S6500


Sprint®



DIMENSIONS										
Mod.	A	D	C	E	F	H	M	SW	Weight (g)	
S6500 4-1/8	4	R1/8	3,5	8,5	9	7,5	17,5	8	9	
S6500 4-1/4	4	R1/4	5	11,5	9	12	19	9	13	
S6500 5-1/8	5	R1/8	5,5	8,5	10	7,5	20,5	9	13	
S6500 5-1/4	5	R1/4	5,5	11,5	10	12	20,5	9	17	
S6500 6-1/8	6	R1/8	4	9	12,7	7,5	20	9	15	
S6500 6-1/4	6	R1/4	4	11,5	12,7	12	20	9	16	
S6500 8-1/8	8	R1/8	5	10,5	14,2	6,5	22,5	11	18	
S6500 8-1/4	8	R1/4	5	11,5	14,2	12,5	22,5	11	21	
S6500 8-3/8	8	R3/8	7	13	14,2	11,5	24,5	12	25	
S6500 10-1/4	10	R1/4	5,8	13	16,5	11,5	26	13	33	
S6500 10-3/8	10	R3/8	5,8	13	16,5	12	26	13	33	
S6500 12-1/4	12	R1/4	7,3	14,5	19,5	11	26,5	15	46	
S6500 12-3/8	12	R3/8	7,3	13,5	19,5	11,5	26,5	15	39	

Fittings Mod. 6525


Swivel elbow Mod. Sprint®


DIMENSIONS

Mod.	A	C	D	E	F	H	M	SW	SW1	Weight (g)
6525 6-1/8	6	4	G1/8	33,8	12,7	5,5	20	9	12	34
6525 6-1/4	6	4	G1/4	34	12,7	7	20	9	14	47
6525 8-1/8	8	5	G1/8	34,8	14,2	5,5	22,5	11	12	35
6525 8-1/4	8	5	G1/4	35	14,2	7	22,5	11	14	50

Fittings Mod. 6621 Micro


Adjustable with Mod. 2661 assembled

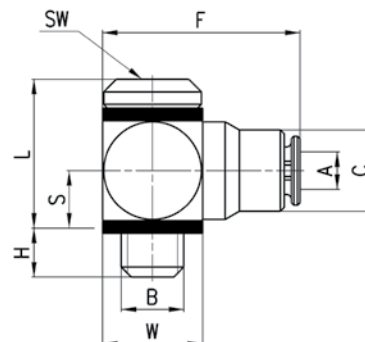
DIMENSIONS

Mod.	A	B	C	F	H	L	S	W	SW	Weight (g)
6621 3-M3	3	M3	5,8	14,2	2,5	9,3	3,5	6	1,5	5
6621 3-M5	3	M5	6,5	16	3,2	11,9	4,8	8	2	6

Fitting Mod. 6501 4-M5


With Mod. 2661 assembled


DIMENSIONS

Mod.	A	C	D	E	F	H	M	SW	Weight (g)
6501 4-M5	4	3,5	M5	6	9	4	17,5	8	11

Fittings Mod. S6430


Swivel branch tee, Mod. Sprint®



DIMENSIONS										
Mod.	A	D	C	E	F	H	L	SW	SW1	Weight (g)
S6430 4-1/8	4	G1/8	3,5	14,5	9	5,5	35	8	12	18
S6430 5-1/8	5	G1/8	5,5	14,5	10	5,5	41	9	12	24
S6430 5-1/4	5	G1/4	5,5	14,5	10	7	41	9	14	30
S6430 6-1/8	6	G1/8	4	15	12,7	5,5	40	9	12	28
S6430 6-1/4	6	G1/4	4	15	12,7	7	40	9	14	33
S6430 8-1/8	8	G1/8	5	16	14,2	5,5	45	11	12	37
S6430 8-1/4	8	G1/4	5	16	14,2	7	45	11	14	42
S6430 8-3/8	8	G3/8	5	16,5	14,2	8	45	11	19	51
S6430 10-1/4	10	G1/4	5,8	18,5	16,5	7	52	13	14	56
S6430 10-3/8	10	G3/8	5,8	19	16,5	8	52	13	19	67
S6430 10-1/2	10	G1/2	5,8	19,5	16,5	9	52	13	22	85
S6430 12-1/4	12	G1/4	7,3	20	19,5	7	53	15	17	60
S6430 12-3/8	12	G3/8	7,3	20	19,5	8	53	15	19	65
S6430 12-1/2	12	G1/2	7,3	20,5	19,5	9	53	15	22	89
S6430 14-1/2	14	G1/2	8,3	21,5	21,5	9	57	17	22	88

Fittings Mod. 6432 Micro

Swivel branch tee

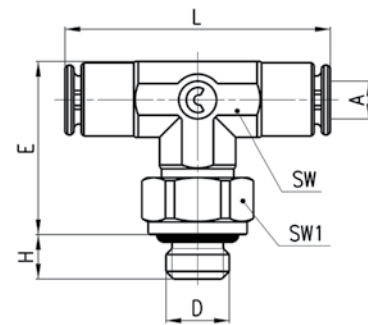


DIMENSIONS									
Mod.	A	D	E	H	L	SW	SW1	Weight (g)	
6432 3-M3	3	M3	13,7	2,5	21,4	6	6	5	★
6432 3-M5	3	M5	13,7	3,5	21,4	6	8	6	●

★ = with Mod. 2661 assembled
 ● = with O-Ring assembled

Fittings Mod. 6432


Swivel branch tee with O-Ring assembled

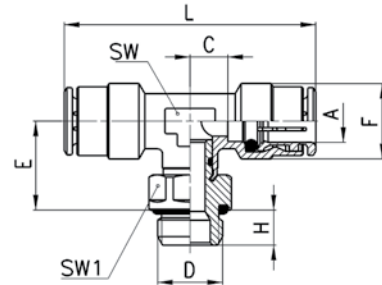

DIMENSIONS										
Mod.	A	D	C	E	F	H	L	SW	SW1	Weight (g)
6432 4-M5	4	M5	3,5	12,5	9	4	35	8	8	14
6432 4-1/8	4	G1/8	3,5	14,5	9	6	35	8	12	19
6432 5-M5	5	M5	5,5	12,5	10	4	41	9	8	19
6432 6-1/8	6	G1/8	4	15	12,7	6	40	9	12	29
6432 6-1/4	6	G1/4	4	16	12,7	7	40	9	15	30
6432 8-1/8	8	G1/8	5	16	14,2	6	45	11	12	37
6432 8-1/4	8	G1/4	5	17	14,2	7	45	11	15	39
6432 8-3/8	8	G3/8	5	17	14,2	7	45	11	19	55
6432 10-1/4	10	G1/4	5,8	19,5	16,5	7	52	13	15	59
6432 10-3/8	10	G3/8	5,8	19,5	16,5	7	52	13	19	56
6432 12-1/4	12	G1/4	7,3	20	19,5	7	53	15	17	60
6432 12-3/8	12	G3/8	7,3	20,5	19,5	7	53	15	19	80

Fittings Mod. S6440


Swivel branch tee, Mod. Sprint

Sprint®.


DIMENSIONS											
Mod.	A	D	C	E	F	H	L	M	SW	SW1	Weight (g)
S6440 4-1/8	4	G1/8	3,5	14,5	9	5,5	37,5	17,5	8	12	23
S6440 5-1/8	5	G1/8	5,5	14,5	10	5,5	40,5	20,5	9	12	24
S6440 6-1/8	6	G1/8	4	15	12,7	5,5	40,5	20	9	12	26
S6440 6-1/4	6	G1/4	4	15	12,7	7	42	20	9	14	31
S6440 8-1/8	8	G1/8	5	16	14,2	5,5	44	22,5	11	12	37
S6440 8-1/4	8	G1/4	5	16	14,2	7	45,5	22,5	11	14	35
S6440 8-3/8	8	G3/8	5	16,5	14,2	8	47	22,5	11	19	52
S6440 10-1/4	10	G1/4	5,8	18,5	16,5	7	51,5	26	13	14	43
S6440 10-3/8	10	G3/8	5,8	18,5	16,5	8	53	26	13	19	66
S6440 12-3/8	12	G3/8	7,3	19,5	19,5	8	54,5	26,5	15	19	65
S6440 14-1/2	14	G1/2	8,3	21,5	21,5	9	59	28,5	17	22	88

Fittings Mod. 6442 Micro

Swivel run tee

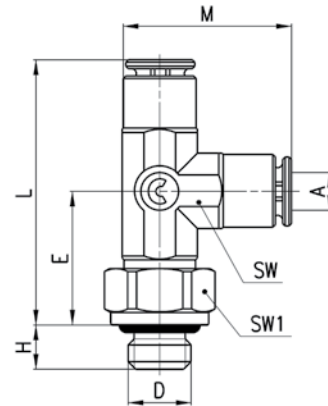


* = with Mod. 2661 assembled
 • = with O-Ring assembled

Mod.	A	D	E	H	L	M	SW	SW1	Weight (g)
6442 3-M3	3	M3	10,7	2,5	21,4	13,7	6	6	5 ★
6442 3-M5	3	M5	12,2	3,5	21,4	13,7	6	8	6 •

Fittings Mod. 6442


Swivel branch tee with O-Ring assembled



Mod.	A	C	D	E	F	H	L	M	SW	SW1	Weight (g)
6442 4-M5	4	3,5	M5	12,5	9	4	34	17,5	8	8	18
6442 4-1/8	4	3,5	G1/8	14,5	9	6	38	17,5	8	12	19
6442 5-M5	5	5,5	M5	12,5	10	4	36,5	20,5	9	8	19
6442 6-1/8	6	4	G1/8	15	12,7	6	41	20	9	12	26
6442 6-1/4	6	4	G1/4	16	12,7	7	43	20	9	15	36
6442 8-1/8	8	5	G1/8	16	14,2	6	44,5	22,5	11	12	31
6442 8-1/4	8	5	G1/4	17	14,2	7	46,5	22,5	11	15	42
6442 8-3/8	8	5	G3/8	17	14,2	7	46,5	22,5	11	19	50
6442 10-1/4	10	5,8	G1/4	19,5	16,5	7	52,5	26	13	15	46
6442 10-3/8	10	5,8	G3/8	19,5	16,5	7	52,5	26	13	19	66
6442 12-1/4	12	7,3	G1/4	20	16,5	7	53,5	26,5	15	17	73
6442 12-3/8	12	7,3	G3/8	20,5	19,5	7	54	26,5	15	19	64

Fittings Mod. 6452 Micro

Swivel Y connector

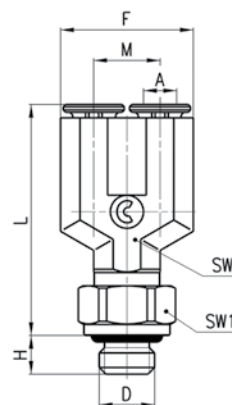

DIMENSIONS

Mod.	A	D	F	H	L	M	SW	SW1	Weight (g)	
6452 3-M3	3	M3	12	2,5	20,9	6	6	6	6	*
6452 3-M5	3	M5	12	3,5	20,9	6	6	8	7	•

* = with Mod. 2661 assembled
 • = with O-Ring assembled

Fittings Mod. 6541 - S6450

Swivel Y connector

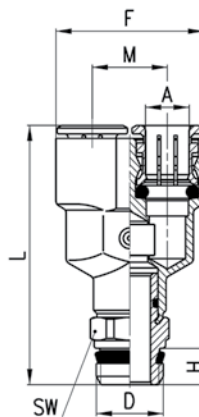
Sprint®

DIMENSIONS

Mod.	A	D	F	H	L	M	SW	Weight (g)	
6451 4-M5	4	M5	18	4	26,5	9	-	17	*
6451 6-M5	6	M5	24,5	4	29,5	12,5	-	27	*
S6450 4-1/8	4	G1/8	18	5,5	38	9	12	23	
S6450 6-1/8	6	G1/8	24,5	5,5	41,5	12,5	12	33	
S6450 8-1/8	8	G1/8	28,5	5,5	48,5	14,5	14	48	
S6450 8-1/4	8	G1/4	28,5	7	50	14,5	14	50	

* = non swivel Model, with Mod. 2661 assembled.

Fittings Mod. 6622


Banjo with O-Ring assembled


DIMENSIONS

Mod.	A	B	C	E	F	H	L	M	SW	W	Weight (g)
6622 4-M5	4	M5	4	5,7	8,8	4	15,8	18	2,5	Ø 8	10
6622 4-1/8	4	G1/8	7,5	10,2	9	5	25	21,5	4	Ø 14	22
6622 6-1/8	6	G1/8	8	10,2	12,7	5	25	24	4	Ø 14	24
6622 6-1/4	6	G1/4	10	9,1	12,7	6	25,3	26	5	Ø 18	35
6622 8-1/8	8	G1/8	8	10,2	14,2	5	25	25,5	4	Ø 14	28
6622 8-1/4	8	G1/4	10	9,1	14,2	6	25,3	27,5	5	Ø 18	39
6622 10-1/4	10	G1/4	8,8	9,1	16,5	6	25,3	29	5	Ø 18	42

Fittings Mod. 6632


Banjo with O-Ring assembled

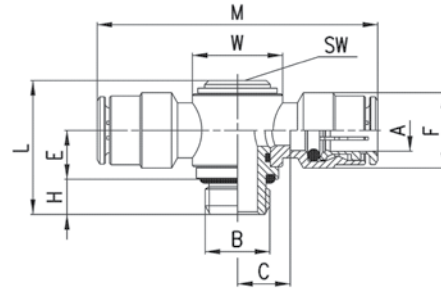

DIMENSIONS											
Mod.	A	B	C	E	F	H	L	M	W	SW	Weight (g)
6632 4-1/8	4	G1/8	7,5	10,2	9	5	25	43	Ø 14	4	24
6632 6-1/8	6	G1/8	8	10,2	12,7	5	25	48	Ø 14	4	33
6632 6-1/4	6	G1/4	10	9,1	12,7	6	25,3	52	Ø 18	5	35
6632 8-1/8	8	G1/8	8	10,2	14,2	5	25	51	Ø 14	4	39
6632 8-1/4	8	G1/4	10	9,1	14,2	6	25,3	55	Ø 18	5	40
6632 10-1/4	10	G1/4	8,8	9,1	16,5	6	25,3	58	Ø 18	5	50

Fittings Mod. 6620

Assembly with Mod. 1631, 1635



DIMENSIONS								
Mod.	A	C	F	L	O	V	W	Weight (g)
6620 4-M5	4	5	9	38	9	5,1	Ø 9	13
6620 4-1/8	4	7,5	9	43	14,5	9,8	Ø 14	19
6620 6-1/8	6	8	12,7	48	14,5	9,8	Ø 14	24
6620 6-1/4	6	10	12,7	52	14,5	13,2	Ø 18	26
6620 8-1/8	8	8	14,2	51	14,5	9,8	Ø 14	32
6620 8-1/4	8	10	14,2	55	14,5	13,2	Ø 18	34

Fittings Mod. 1631


For codes, drawings and dimensions please refer to page 4/2.05.09



Mod.
1631 01-
1631 02-
1631 03-


Fittings Mod. 6610

Models without reference (* or ●) can be always assembled with Mod. 1631; 1635.



DIMENSIONS								
Mod.	A	C	F	M	O	V	W	Weight (g)
6610 4-M5	4	5	9	19	9	5,1	Ø 9	9
6610 4-M6	4	5	9	19	9	5,1	Ø 9	8 ●
6610 4-1/8	4	7,5	9	21,5	14,5	9,8	Ø 14	14
6610 5-M5	5	5	10	20	9	5,1	Ø 9	9
6610 5-M6	5	5	10	20	9	5,1	Ø 9	8 ●
6610 5-1/8	5	8	10	23	14,5	9,8	Ø 14	16
6610 6-M5	6	6,5	12,7	22,5	9	5,1	Ø 10	12
6610 6-M6	6	6,5	12,7	22,5	9	5,1	Ø 10	12 ●
6610 6-1/8	6	8	12,7	24	14,5	9,8	Ø 14	16
6610 6-1/4	6	10	12,7	26	14,5	13,2	Ø 18	19
6610 8-1/8	8	8	14,2	25,5	14,5	9,8	Ø 14	19
6610 8-1/4	8	10	14,2	27,5	14,5	13,2	Ø 18	22
6610 8-3/8	8	11	14,2	28,5	14,5	16,7	Ø 21	23
6610 10-1/4	10	8,8	16,5	29	14,5	13,2	Ø 18	22 *
6610 10-3/8	10	10,3	16,5	30,5	14,5	16,7	Ø 21	23 *
6610 12-1/2	12	12,8	16,5	32	14,5	21	Ø 26	37 *

● = Assembly required with Mod. SCU, SVU, SCO... M5.
 * = Assembly required with Mod. 1635


Fittings Mod. 6811
Sprint®


DIMENSIONS							
Mod.	G	D	H	T	L	SW	Weight (g)
6811 4-M5	4	M5	4	16,5	24,5	8	3 *
6811 4-1/8	4	G1/8	5,5	16,5	27,8	12	10
6811 5-1/8	5	G1/8	5,5	18	29,3	12	9
6811 5-1/4	5	G1/4	7	18	31	14	11
6811 6-1/8	6	G1/8	5,5	18	29,3	12	10
6811 6-1/4	6	G1/4	7	18	31	14	12
6811 8-1/8	8	G1/8	5,5	20,5	31,8	12	12
6811 8-1/4	8	G1/4	7	20,5	33,5	14	13
6811 10-1/4	10	G1/4	7	23	36	14	16
6811 10-3/8	10	G3/8	8	23	37,3	19	25
6811 12-3/8	12	G3/8	8	24	38,3	19	25
6811 14-1/2	14	G1/2	9	28	44	22	39

* = with O-Ring assembled


Fittings Mod. S6110

New pieces




DIMENSIONS										
Mod.	A	D	E	F	H	L	M	SW	SW1	Weight (g)
S6110 6-1/8	6	G1/8	14	12,7	5,5	32,5	20,5	11	12	21
S6110 6-1/4	6	G1/4	14	12,7	7	34,5	20,5	11	14	25
S6110 8-1/8	8	G1/8	14	14,2	5,5	32,5	22,5	11	12	21
S6110 8-1/4	8	G1/4	14	14,2	7	34,5	22,5	11	14	26
S6110 8-3/8	8	G3/8	14,5	14,2	8	35	22,5	11	19	38
S6110 10-1/4	10	G1/4	15,5	16,5	7	39,5	26,5	15	17	39
S6110 10-3/8	10	G3/8	15,5	16,5	8	39,5	26,5	15	19	44
S6110 10-1/2	10	G1/2	16	16,5	9	40	26,5	15	22	57
S6110 12-1/4	12	G1/4	15,5	19,5	7	40,5	26,5	15	17	41
S6110 12-3/8	12	G3/8	15,5	19,5	8	40,5	26,5	15	19	46
S6110 12-1/2	12	G1/2	16	19,5	9	41	26,5	15	22	59

Fittings Mod. 6590 Micro




DIMENSIONS							
Mod.	A	B	F	L	MAX	T	Weight (g)
6590 3	3	M7x0,75	5,8	18,4	5	11,4	4

Fittings Mod. 6590


Mod.	A	B	F	L	N	MAX	SW	SW1	T	Weight (g)
6590 4	4	M10x1	8,8	29	14	10,5	14	14	20	16
6590 5	5	M12x1	9,8	31	15	10,5	17	17	20	25
6590 6	6	M14x1	12,5	33	16	10,5	17	17	20	28
6590 8	8	M16x1	14,5	36	17,5	11,5	19	19	21	35
6590 10	10	M18x1	16,3	41,5	20,2	13	22	22	23,5	51
6590 12	12	M20x1	18,8	39,5	19,2	14,5	24	24	25	56
6590 14	14	M22x1	20,5	41,5	20,2	17,5	27	27	30	82

Fittings Mod. 6580 Micro


Rings UNI 7435 and DIN 471



Mod.	A	G	L	S	Weight (g)
6580 3	3	5,8	19,9	2,2	2

Fittings Mod. 6580


Rings UNI 7434 and DIN 6799



Mod.	A	F	G	L	N	S	S1	S2	Weight (g)
6580 4	4	8,4	9	29	14	5	2,2	1,6	11
6580 5	5	9,4	10	31	15	5	2,2	1,6	15
6580 6	6	11,7	12	34	16	5	2,2	1,6	16
6580 8	8	13,7	14	37	17,5	5	2,2	1,6	23
6580 10	10	15,4	17	41,5	20,2	5	2,2	1,6	33
6580 12	12	18,3	19	39,5	19,2	5,2	2,2	1,6	40
6580 14	14	20,5	21	41,5	20,2	5,2	2,2	1,6	47

Fittings Mod. 6580 - reduction


New pieces



Mod.	A	B	F	G	L	M	N	Weight (g)
6580 6-4	6	4	12	9	31,5	16	14	12
6580 8-6	8	6	14	12,2	35	17,5	16	19
6580 10-8	10	8	16	14	39	20	17,5	25
6580 12-10	12	10	19	16	40,5	19	20	35


Fittings Mod. 6593

New pieces




Mod.	A	D	E	F	G	H	L	K (max)	K (min)	SW	SW1	Weight (g)
6593 6-1/8	6	G1/8	10	M12x1	16,4	6	24,5	8,5	2	15	17	19
6593 6-1/4	6	G1/4	11,5	M12x1	18,5	7	26	6,5	2	17	17	22
6593 8-1/8	8	G1/8	10	M15x1	18,5	6	27	9,5	2	17	19	26
6593 8-1/4	8	G1/4	11,5	M15x1	18,5	7	28,5	9,5	2	17	19	26
6593 10-3/8	10	G3/8	12,8	M18x1	24,5	8	32,5	12	2	22	22	43


Fittings Mod. 6550 Micro




Mod.	A	M	SW	Weight (g)
6550 3	3	13,7	6	3

Fittings Mod. 6550


DIMENSIONS						
Mod.	A	C	F	M	SW	Weight (g)
6550 4	4	3,5	9	17,5	8	8
6550 5	5	5,5	10	20,5	9	15
6550 6	6	4	12,7	20	9	17
6550 8	8	5	14,2	22,5	11	22
6550 10	10	5,8	16,5	26	13	30
6550 12	12	7,3	19,5	26,5	15	44
6550 14	14	8,3	21,5	28,5	17	71


Fittings Mod. 6540 Micro


DIMENSIONS					
Mod.	A	L	M	SW	Weight (g)
6540 3	3	21,4	13,7	6	4

Fittings Mod. 6540


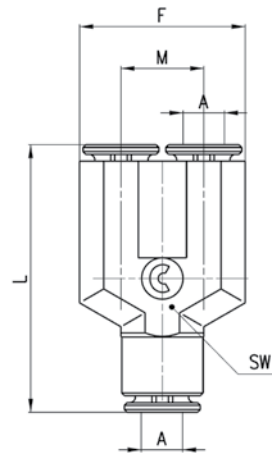

DIMENSIONS							
Mod.	A	C	F	L	M	SW	Weight (g)
6540 4	4	3,5	9	35	17,5	8	14
6540 5	5	5,5	10	41	20,5	9	21
6540 6	6	4	12,7	40	20	9	24
6540 8	8	5	14,2	45	22,5	11	32
6540 10	10	5,8	16,5	52	26	13	43
6540 12	12	7,3	19,5	53	26,5	15	60
6540 14	14	8,3	21,5	57	28,5	17	75

Fittings Mod. 6600

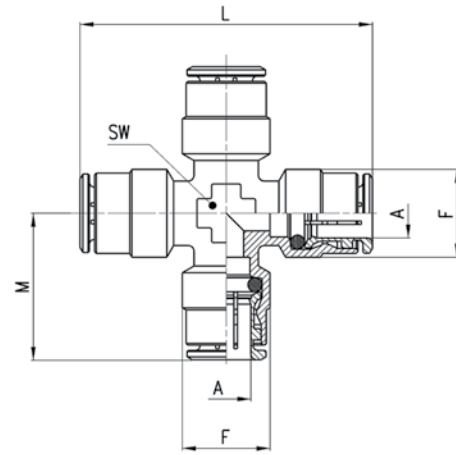


Mod.	A	F	L	M	SW	Weight (g)
6600 4	4	9	38	19	9	26
6600 5	5	10	41	20,5	9	29
6600 6	6	12,7	44	22	10	35
6600 8	8	14,2	49	24,5	12	50
6600 10	10	16,5	55	27,5	14	63
6600 12	12	19,5	56	28	16	84

Fittings Mod. 6560 Micro




Mod.	A	F	L	M	SW	Weight (g)
6560 3	3	12	20,4	6	6	5

Fittings Mod. 6560

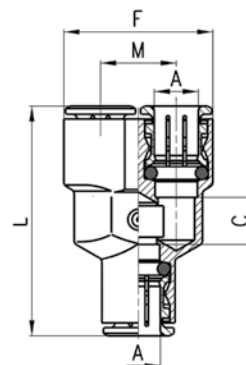


Mod.	A	C	F	L	M	Weight (g)
6560 4	4	5	18	33	9	19
6560 6	6	7	24,5	39	12,5	30
6560 8	8	9	28,5	44	14,5	42
6560 10	10	15,5	32	53,5	16	63

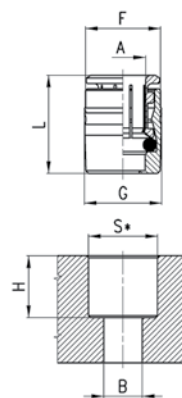Cartridge Mod. 6700 Micro

DIMENSIONS


Mod.	A	B	F	G	H	L	S	Weight (g)
6700 3	3	2	5,9	6,2	6,3	9,2	6	1

Cartridge Mod. 6700

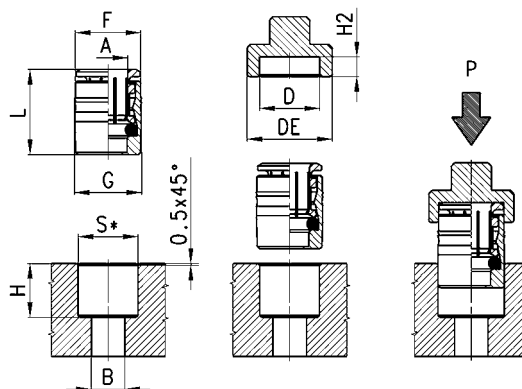

S* = Metallic seat (+ 0.05 - 0)
 S* = Synthetic seat (+ 0.03 - 0,02).


DIMENSIONS

Mod.	A	B	D	DE	F	G	H	H2	L	S*	P min (Kg)	P max (Kg)	Weight (g)
6700 4	4	3,5	8,8	14	8,6	9	11	3,1	14,5	8,75	314	439	4
6700 5	5	3,5	9,8	15	9,6	10	11,5	3,1	15,5	9,75	251	439	5
6700 6	6	4	12	17	11,8	12,2	12	3,6	16,5	11,95	314	533	8
6700 8	8	6	14	19	13,8	14,2	14	3,1	18	13,95	345	471	11
6700 10	10	8	16	21	15,8	16,2	16,5	3,1	20,5	15,95	439	485	15


Closed pushing fittings Mod. 6750

DIMENSIONS

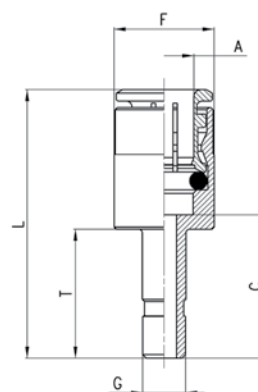Mod.	A	G	L	Weight (g)
6750 4	4	8,8	15	4
6750 6	6	11,8	17	7
6750 8	8	13,8	18,5	9
6750 10	10	15,8	21	12
6750 12	12	17,8	20	15

Fittings Mod. 6850

DIMENSIONS

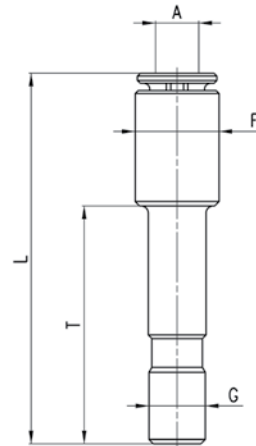
Mod.	A	G	C	F	L	T	Weight (g)
6850 6-4	6	4	17,5	12,7	33,5	16,5	11
6850 8-6	8	6	19	14	36,5	18	15

Fitting Mod. 6800 Micro




DIMENSIONS						
Mod.	A	F	G	L	T	Weight (g)
6800 3-4	3	5,8	4	26	16,5	2


Fittings Mod. 6800



DIMENSIONS							
Mod.	A	G	C	F	L	T	Weight (g)
6800 4-5	4	5	19	9	33	18	8
6800 4-6	4	6	15,5	9	29,5	18	9
6800 4-8	4	8	18	9	32	20,5	10
6800 5-6	5	6	19	10	34	18	11
6800 5-8	5	8	18	10	33	20,5	12
6800 6-8	6	8	18	12,7	34	20,5	12
6800 6-10	6	10	20,5	12,7	36,5	23	17
6800 6-12	6	12	17,5	12,7	33,5	24	21
6800 8-10	8	10	20,5	14	38	23	15
6800 8-12	8	12	21,5	14	39	24	22
6800 10-12	10	12	20,3	16,5	40,5	24	27
6800 10-14	10	14	24,3	16,5	44,5	28	33
6800 12-14	12	14	24,3	18,8	45,5	28	27

Fittings Mod. 6950


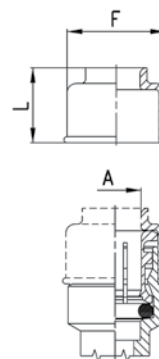
DIMENSIONS			
Mod.	G	L	Weight (g)
6950 4	4	32,5	3
6950 6	6	35,5	4
6950 8	8	40,5	7
6950 10	10	46	10
6950 12	12	48	13
6950 14	14	52	17

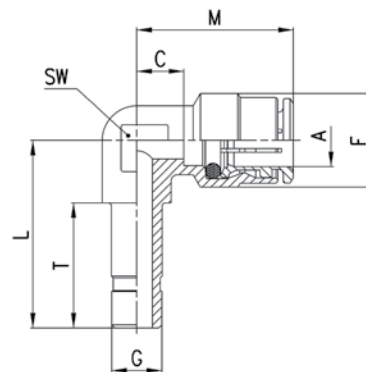Fittings Mod. 6555


DIMENSIONS									
Mod.	A	G	C	L	F	T	M	SW	Weight (g)
6555 4-4	4	4	3,5	22	9	16,5	17,5	9	8
6555 6-6	6	6	4	24,5	12,7	18	20	9	14
6555 8-8	8	8	5	27,5	14,2	20	22,5	11	21
6555 10-10	10	10	5,8	32	16,5	23	26	13	26

Protection caps Mod. 6708



Self-extinguishing material
colour black V0



DIMENSIONS				
Mod.	A	F	L	Weight (g)
6708 4	4	10,7	10,7	1
6708 5	5	11,7	11	1
6708 6	6	13,7	11,5	1
6708 8	8	15,7	12,5	1
6708 10	10	18,5	13	1
6708 12	12	20,7	15	2
6708 14	14	23,7	15	2

Plug Mod. 6900 Micro

Material: plastic




DIMENSIONS

Mod.	G	L	P	T	Weight (g)
6900 3	3	20,5	6	13,5	1

Plug Mod. 6900

Material: plastic



DIMENSIONS

Mod.	G	L	P	T	Weight (g)
6900 4	4	29	8	20	1
6900 5	5	29,5	8	20,5	1
6900 6	6	31,5	8	22,5	1
6900 8	8	34,5	12	24,5	2
6900 10	10	37	12	27	2
6900 12	12	40,5	16	28,5	3
6900 14	14	42,5	16	30,5	3

Disconnecting tube set Mod. SP

The set includes keys to disconnect tubes with diameters between 4 and 12 mm.



Mod.
SP

03 5278 8222

sales@factorycontrols.com.au

www.factorycontrols.com.au

 65 Douro Street, North Geelong Victoria 3215